PATENT 915.403

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: Kosonen et al

Serial No.: 10/006,921 Group No.: 2661

Filed: December 3, 2001 Examiner:

For: Multiplexing and DeMultiplexing Method and Apparatus

Commissioner of Patents and Trademarks

Washington, D.C. 20231

TRANSMITTAL OF CERTIFIED COPY

Attached please find the certified copy of the foreign application from which priority is claimed for this case:

Country : EP
Application Number : PCT/EP99/04215
Filing Date : 17 June 1999

Reg. No. 27,550

Tel. No. (203) 261-1234

SIGNATURE OF ATTORNEY

Alfred A. Fressola

Type or print name of attorney

WARE, FRESSOLA, VAN DER SLUYS & ADOLPHSON

P.O. Address

755 Main Street, PO Box 224
Monroe, CT 06468

NOTE: The claim to priority need be in no special form and may be made by the attorney or agent if the foreign application is referred to in the oath or declaration as required by § 1.63.

CERTIFICATE OF MAILING (37 CFR 1.8a).

I hereby certify that this paper (along with any paper referred to as being attached or enclosed) is being deposited with the United States Postal Service on the date shown below with sufficient postage as first class mail in an envelope addressed to the: Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Date: March 4, 2002

Anita Schelmetic

(Type or print name of person mailing paper)

Anita Schelmetic

(Signature of person mailing paper)

Europäisches Patentamt | European Patent Office | Office européen des brevets

Bescheinigung | Certificate | Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten internationalen Patentanmeldung überein.

The attached documents are exact copies of the international patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet international spécifiée à la page suivante.

Den Haag, den
The Hague,
La Haye, le 28. 11. 2001

Der Präsident des Europäischen Patentamts
Im Auftrag
For the President of the European Patent Office
Le Président de l'Office européen des brevets
p.o.

R. BEYTORUN

Patentanmeldung Nr.
Patent application no.
Demande de brevet n° PCT/EP 99/04215

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.:
Demande n°: PCT/EP 99/04215

Anmelder:
Applicant(s):
Demandeur(s): 1. NOKIA TELECOMMUNICATIONS OY - Espoo, Finland
2. KOSONEN, Mika - Espoo, Finland
3. TUOMISTO, Janne - Helsinki, Finland

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention: MULTIPLEXING AND DEMULTIPLEXING METHOD AND APPARATUS

Anmeldetag:
Date of filing:
Date de dépôt: 17 June 1999 (17.06.99)

In Anspruch genommene Priorität(en)
Priority(ies) claimed
Priorité(s) revendiquée(s)

Staat: State: Pays:	Tag: Date: Date:	Aktenzeichen: File no. Numéro de dépôt:

Benennung von Vertragsstaaten : Siehe Formblatt PCT/RO/101 (beigefügt)
Designation of contracting states : See Form PCT/RO/101 (enclosed)
Désignation d'états contractants : Voir Formulaire PCT/RO/101 (ci-joint)

Bemerkungen:
Remarks:
Remarques:

PCT REQUEST

Original (for SUBMISSION) - printed on 17.06.1999 02:28:58 PM

III-2	**Applicant and/or inventor**	
III-2-1	This person is:	applicant and inventor
III-2-2	Applicant for	US only
III-2-4	Name (LAST, First)	TUOMISTO, Janne
III-2-5	Address:	Rakentajantie 1D 45 FIN-00370 Helsinki Finland
III-2-6	State of nationality	FI
III-2-7	State of residence	FI
IV-1	**Agent or common representative; or address for correspondence** The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as:	agent
IV-1-1	Name (LAST, First)	PELLMANN, Hans-Bernd
IV-1-2	Address:	Tiedtke-Bühling-Kinne et al. Bavariaring 4 D-80336 München Germany
IV-1-3	Telephone No.	+49 89 544690
IV-1-4	Facsimile No.	+49 89 532611
IV-1-5	e-mail	postoffice tbk-patent.com
IV-2	**Additional agent(s)**	additional agent(s) with same address as first named agent
IV-2-1	Name(s)	TIEDTKE, Harro; BÜHLING, Gerhard; KINNE, Reinhard; GRAMS, Klaus; LINK, Annette; VOLLNHALS, Aurel; LESON, Thomas, Johannes, Alois; TRÖSCH, Hans-Ludwig; CHIVAROV, Georgi; GRILL, Matthias; KÜHN, Alexander; OSER, Andreas; BÖCKELEN, Rainer
V	**Designation of States**	
V-1	Regional Patent (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)	AP: GH GM KE LS MW SD SL SZ UG ZW and any other State which is a Contracting State of the Harare Protocol and of the PCT EA: AM AZ BY KG KZ MD RU TJ TM and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT EP: AT BE CH&LI CY DE DK ES FI FR GB GR IE IT LU MC NL PT SE and any other State which is a Contracting State of the European Patent Convention and of the PCT OA: BF BJ CF CG CI CM GA GN GW ML MR NE SN TD TG and any other State which is a member State of OAPI and a Contracting State of the PCT

RO/EP

PCT REQUEST

Original (for SUBMISSION) - printed on 17.06.1999 02:28:58 PM

V-2	National Patent (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)	AE AL AM AT AU AZ BA BB BG BR BY CA CH&LI CN CU CZ DE DK EE ES FI GB GD GE GH GM HR HU ID IL IN IS JP KE KG KP KR KZ LC LK LR LS LT LU LV MD MG MK MN MW MX NO NZ PL PT RO RU SD SE SG SI SK SL TJ TM TR TT UA UG US UZ VN YU ZA ZW
V-5	**Precautionary Designation Statement** In addition to the designations made under items V-1, V-2 and V-3, the applicant also makes under Rule 4.9(b) all designations which would be permitted under the PCT except any designation(s) of the State(s) indicated under item V-6 below. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit.	
V-6	**Exclusion(s) from precautionary designations**	NONE
VI	**Priority claim**	NONE
VII-1	**International Searching Authority Chosen**	European Patent Office (EPO) (ISA/EP)

		number of sheets	electronic file(s) attached
VIII	**Check list**		
VIII-1	Request	4	-
VIII-2	Description	13	-
VIII-3	Claims	6	-
VIII-4	Abstract	1	wo23150a.txt
VIII-5	Drawings	3	-
VIII-7	TOTAL	27	
	Accompanying items	paper document(s) attached	electronic file(s) attached
VIII-8	Fee calculation sheet	✓	-
VIII-16	PCT-EASY diskette	-	diskette
VIII-18	**Figure of the drawings which should accompany the abstract**	3	
VIII-19	**Language of filing of the international application**	English	
IX-1	**Signature of applicant or agent**	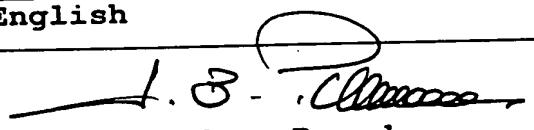	
IX-1-1	Name (LAST, First)	PELLMANN, Hans-Bernd	

FOR RECEIVING OFFICE USE ONLY

10-1	**Date of actual receipt of the purported international application**	(17. 06. 99) 17 JUN 1999
10-2	**Drawings:**	17 JUN 1999
10-2-1	Received	
10-2-2	~~Not received~~	
10-3	**Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application**	
10-4	**Date of timely receipt of the required corrections under PCT Article 11(2)**	

Multiplexing and demultiplexing method and apparatus

FIELD OF THE INVENTION

The present invention relates to a multiplexing and demultiplexing method and apparatus to be used in a data network such as an ATM (Asynchronous Transfer Mode) network.

BACKGROUND OF THE INVENTION

ATM is a transfer mode in which information is organized into cells. It is asynchronous in the sense that the recurrence of cells containing information from an individual user is not necessarily periodic. ATM is a layered architecture allowing multiple services like voice, data and video to be mixed over the network.

It is desirable that a common interface between the lowest physical layer (PHY) and upper layer modules such as the ATM layer is defined, to thereby allow a common PHY interface in ATM subsystems across a wide range of speeds and media types.

In many cases, an arrangement is provided, where a plurality of PHY devices are connected via the PHY interface to a single ATM device. Thus, an address has to be allocated to the PHY devices, which is used by the higher layer device in order to individually access one of the PHY devices in order to perform a data transfer. However, the number of available addresses according to the PHY interface specification may not be large enough to support a desired number of physical devices.

Although conversion circuits such as multiplexer/demultiplexer (MUX/DEMUX) circuits are known to connect a plurality of non-addressable PHY devices to a higher layer device, these circuits are not suitable for overcoming the above problem, because they also demand a respective address for each of the non-addressable PHY devices.

SUMMARY OF THE INVENTION

It is therefore an object of the present invention, to provide a multiplexing and demultiplexing method and apparatus, by means of which the number of PHY devices connectable via a PHY interface can be increased without increasing the required number of addresses.

This object is achieved by a multiplexing method for supplying input data received from one of a plurality of input channels to an output channel, comprising the steps of:
providing a plurality of input buffers respectively connected to the plurality of input channels, and an output buffer connected to the output channel;
storing the received input data in a respective one of the plurality of input buffers; and
releasing transmission of the input data from the respective one of the plurality of input buffers to the output buffer, when the output buffer is capable of receiving data.

Furthermore, the above object is achieved by a demultiplexing method for supplying input data received

from an input channel to a plurality of output channels, comprising the steps of:

providing an input buffer connected to the input channel and a plurality of output buffers respectively connected to the plurality of output channels;

storing the input data in the input buffer; and

releasing transmission of the input data from the input buffer to the plurality of output buffers, when all of the plurality of output buffers are capable of receiving data.

Additionally, the above object is achieved by a multiplexing apparatus for supplying input data received from one of a plurality of input channels of the multiplexing apparatus to an output channel thereof, comprising:

a plurality of input buffer means respectively connected to the plurality of input channels, wherein the input data is stored in a respective one of the plurality of input buffer means;

output buffer means connected to the output channel; and

control means for releasing a transmission from the respective one of the plurality of input buffer means to the output buffer means, when the output buffer means is capable of receiving data.

Moreover, the above object is achieved by a demultiplexing apparatus for supplying input data received from an input channel of the demultiplexing apparatus to a plurality of output channels thereof, comprising:

input buffer means for storing the input data;

a plurality of output buffer means respectively connected to the plurality of output channels; and

control means for releasing a transmission from the input buffer means to the plurality of output buffer means, when

all of the plurality of output buffer means are capable of receiving data.

Accordingly, all physical devices can be placed behind a single interface address and receive the same data. Then, the PHY devices may decide themselves whether the received data belongs to them or not. In one direction (demultiplexing), the data is broadcasted to all PHY devices, while, in the other direction (multiplexing), one PHY device may individually transmit its data at a time.

Accordingly, no further interface addresses are required for the PHY devices connected via a multiplexer/demultiplexer according to the present invention.

Preferably, the input and output buffers can be First-In-First-Out (FIFO) buffers, so that a plurality of data packets can be received and their order maintained.

The plurality of input channels can be connected to a plurality of PHY devices having the same interface address allocated. Thus, even the number of addresses of the PHY devices as such can be reduced, since they are connected to the upper layer network via the multiplexer/demultiplexer according to the present invention, which does not require any addresses for performing the multiplexing/demultiplexing operation.

In particular, the PHY devices may be UTOPIA (Universal Test & Operations PHY Interface for ATM) level 1 compliant. Thus, the multiplexer/demultiplexer according to the present invention can be used as a converter between a UTOPIA Layer 1 interface and a UTOPIA Layer 2 interface, such that non-addressable Layer 1 PHY devices can be

connected to an Layer 2 device. In this case, the output channel may be connected to an ATM device compliant to the UTOPIA level 1 or level 2 interface specifications.

BRIEF DESCRIPTION OF THE DRAWINGS

In the following the present invention will be described in greater detail on the basis of a preferred embodiment with reference to the accompanying drawings, in which:

Fig. 1 shows a principle diagram of a basic ATM reference model,

Figs, 2A and 2B a UTOPIA level 1 reference configuration and a UTOPIA level 2 reference configuration, respectively,

Fig. 3 a block diagram of a multiplexer/demultiplexer according to the preferred embodiment of the present invention, and

Figs. 4A and 4B respective flow diagrams of a control operation of a transmit interface and a receive interface, respectively, according to the preferred embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

In the following, the preferred embodiment of the multiplexing and demultiplexing method and apparatus according to the present invention will be described on the basis of a UTOPIA interface for an ATM system.

The UTOPIA data path interface defines an interface between the physical layer (PHY) and upper layer modules such as the ATM layer and the corresponding management entities (such as a microprocessor or the like). In practice, the UTOPIA data path interface may, however, as well be used between two circuits which both belong to the ATM layer (i.e. ATM to ATM). In particular, the UTOPIA data path specification defines two interface signal groups i.e. transmit (Tx) and receive (Rx).

Fig. 1 shows a basic ATM reference model comprising the UTOPIA interface. According to Fig. 1, three lower level layers are defined to implement the features of ATM. An ATM adaptation layer (AAL) 3 assures appropriate service characteristics and divides all types of data received from higher layers 4 into an 48 byte payload that will make up an ATM cell. Furthermore, an ATM adaptation layer 3 adds a 5 byte header information to the data to be transmitted, so as to assure that the ATM cell is transmitted on the right connection. A physical layer (PHY) 1 defines the electrical characteristics and network interfaces i.e. how the bits are transmitted via the wire. The above defined layers are controlled by a management & control function 5.

As shown in Fig. 1, the UTOPIA interface defines a standard interface between the ATM layer 2 and the PHY layer 1 of ATM subsystems. The interface part where data flows from the ATM layer 2 to the PHY layer 1 is labeled Transmit Interface, and the interface part where data flows from the PHY layer to the ATM layer is labeled Receive Interface.

Transmit and receive transfers are synchronized via the respective interface transfer clock. With an 8-bit data path and a maximum clock rate of 25 MHz, this interface

supports rates from sub-100 to 155 Mbps. Furthermore, higher rates (e.g. 622 Mbps) may be supported by extending the data path to 16 bits and using a faster transfer clock.

The transfer of data is synchronized at the cell level via a Start Of Cell (SOC) signal. This signal is asserted when the data transfer path contains the first byte of a cell.

Given that the PHY layer 1 must accept transfer synchronizing clocks from the ATM layer 2, the PHY layer 1 will require rate matching buffers such as FIFOs. With the use of such FIFOs, flow control signals can be provided to allow both the ATM layer 2 and the PHY layer 1 to throttle the transfer rate.

The Receive Interface transfers data only when ATM layer 1 requests it by asserting an Enable signal. The interface also provides an Empty/Cell Available signal from the PHY layer 1 to allow a PHY layer rate control. A false Empty signal indicates a valid received octet and provides an octet-level flow control. A true Cell Available signal indicates the availability of a whole cell and provides a cell-level flow control.

The Transmit Interface transfers data only when the ATM layer 2 requests it by asserting an Enable signal. The interface also provides a Full/Cell Available signal from the PHY layer 1 to allow a PHY layer rate control. The Full signal is asserted if more than four additional bytes would cause a PHY buffer overflow. The Available signal indicates that enough space is left in the transmit FIFO to hold a complete cell.

In particular, the UTOPIA interface specification is divided into a Level 1 specification and a Level 2 specification. The UTOPIA Level 1 reference configuration is shown in Fig. 2A. According to the Level 1 reference configuration, one ATM device 20 is connected to one PHY device 10. Accordingly, the Level 1 specification specifies an 8 bit wide data path using an octet-level or a cell-level handshake, operating up to 25 MHz with a single PHY device, a cell format and extra signals for a 16-bit wide data path for future use.

Fig. 2B shows a Level 2 reference configuration, wherein an ATM device 21 is connected to a plurality of PHY devices 11 to 1n, wherein $n < 8$ for ATM layers 2 intended for 455 Mbps, and $n < 4$ for ATM layers 2 intended for 622 Mbps. The virtual space is set up for $n < 31$. According to Fig. 2B, addresses 1 to n are allocated by the management & control function 5 shown in Fig. 1.

In the following, the operation of the Transmit Interface, i.e. ATM → PHY, is briefly described.

In Level 1 UTOPIA, there is only one PHY device 10 and the control signal Empty/Cell Available is utilized to convey the transfer status to the ATM device 20. In Level 2 UTOPIA, only one of the PHY devices 11 to 1n at a time can be selected for a cell transfer. The ATM device 21 selects a PHY device by using a corresponding address. Once a PHY device is selected, the data transfer is accomplished by a handshake processing.

If a Level 2 PHY device is to be operated in a Level 1 PHY environment, the address of the Level 2 PHY device is set

to a value programmed by the management & control function 5.

In the following, the Receive Interface is described.

In Level 1 UTOPIA, the signal Full/Cell Available is used to convey a transfer status to the ATM device 20. In Level 2 UTOPIA, only one of the PHY devices 11 to 1 n at a time is selected for a cell transfer. The ATM device 21 selects the PHY device by using the corresponding address. Once a PHY device is selected, the data transfer is accomplished by the handshake processing.

According to the preferred embodiment of the present invention, a UTOPIA multiplexer/demultiplexer and a method thereof is defined, to which a plurality of PHY devices can be connected via a UTOPIA Layer 1 interface and which can be connected to an ATM device via a UTOPIA Layer 1 or Layer 2 interface. Thus, a plurality of PHY devices can be connected to an ATM device by using a single address.

Fig. 3 shows a principle block diagram of the UTOPIA multiplexer/demultiplexer 300 according to the preferred embodiment of the present invention.

According to Fig. 3, the multiplexer/demultiplexer 300 comprises e.g. four FIFO buffers 311 to 314 at the PHY layer side. The PHY FIFO buffers 311 to 314 are respectively connected to Layer 1 PHY devices 101 to 104 via a UTOPIA Layer 1 interface. Furthermore, the multiplexer/demultiplexer 300 comprises a FIFO buffer 301 at the ATM layer side. The ATM FIFO 301 is connected to an ATM device 200 via a UTOPIA Layer 1 or Layer 2 interface.

However, it is to be noted that more or less than the above four PHY devices 101 to 104 and corresponding FIFO buffers 311 to 314 could be connected via the multiplexer/demultiplexer 300 to the ATM device 200, as well. Furthermore, if a Layer 1 interface is used, only one multiplexer/demultiplexer 300 can be connected to the ATM device 200. However, if a Layer 2 interface is provided, a plurality of multiplexers/demultiplexers 300 can be connected to a single ATM device 200 by allocating corresponding addresses to the multiplexers/demultiplexers 300.

Furthermore, the multiplexer/demultiplexer 300 comprises a control logic 320 arranged to exchange control signals with the FIFO buffers 301 and 311 to 314, to thereby control the multiplexing/demultiplexing operation.

In the following, the operation of the multiplexer/demultiplexer 300 is described with reference to Figs. 4A and 4B.

Fig. 4A shows a principle flow diagram of the demultiplexing processing, i.e. UTOPIA Transmit Interface function, performed by the control logic 320.

In case the ATM device 200 transmits an ATM cell or a data octet to one of the PHY devices 101 to 104, a Layer 1 or Layer 2 Transmit Interface data transfer to the ATM FIFO 301 is performed, as described above. The control logic 320 determines in step S100 whether data is available at the ATM FIFO 301. If not, step S100 is repeated until the control logic 320 receives a corresponding control signal from the ATM FIFO 301. Having received the transmitted data, the ATM FIFO 301 transmits a corresponding control signal to the control logic 320, and the processing of the control logic 320 moves to step S101 so as to determine

whether all of the PHY FIFOs 311 to 314 have signalized their capability of receiving data, i.e. availability of empty buffer capacity. If not, step S101 is repeated until the control logic 320 receives a corresponding indication from all PHY FIFOs 311 to 314.

If enough buffer capacity is available at all PHY FIFOs 311 to 314, the control logic 320 issues a release signal to the ATM FIFO 301 to thereby release a transmission operation of the received data via an internal bus system to all of the PHY FIFOs 311 to 314 (step S102). In this respect, it is to be noted, that the internal bus interface between the ATM FIFO 301 and the PHY FIFOs 311 to 314 can be a usual FIFO interface or a UTOPIA Layer 1 interface with the corresponding processings.

Having received the transmitted data, the PHY FIFOs 311 to 314 perform a usual Layer 1 Transmit Interface data transfer to the PHY devices 101 to 104. The PHY devices 101 to 104 may then decide whether the data belongs to them, based on a corresponding information which may be provided in the UTOPIA cell format.

Thus, in the above described egress direction (ATM → PHY), the control logic 320 waits until all PHY FIFO buffers 311 to 314 can receive data, and then releases the ATM FIFO buffer 301 connected to the ATM device 200 to transmit data.

In the following, the multiplexing function i.e. Receive Interface data transfer, of the multiplexer/demultiplexer 300 according to the preferred embodiment is described with reference to Fig. 4B.

If one of the PHY devices 101 to 104 wishes to transmit an ATM cell or data octet to the ATM device 200, it performs a usual UTOPIA Receive Interface data transfer to the corresponding PHY FIFO via the UTOPIA Layer 1 interface.

Then, the control logic 320 waits in step S200 until the availability of the transmitted data at one of the PHY FIFOs 311 to 314 is signalized by a corresponding control signal. If so, the control logic 320 waits in step S201 until it has received a control signal from the ATM FIFO 301, which indicates that the ATM FIFO 301 is capable of receiving data, i.e. enough buffer capacity is available.

If the ATM FIFO 301 has indicated its capability of receiving data by a corresponding control signal, the control logic 320 issues in step S202 a released signal to the requesting PHY FIFO in order to release a data transmission from the respected one of the PHY FIFOs 311 to 314 to the ATM FIFO 301 via the internal bus system. Having received the transmitted data, the ATM FIFO 301 performs a usual UTOPIA Receive Interface data transfer to the ATM device 200 via the UTOPIA Layer 1 or Layer 2 interface, as described above.

Accordingly, in the above described ingress direction (PHY → ATM), the control logic 320 releases one of the PHY FIFO buffers 311 to 314 to transmit data, if the receiving ATM FIFO 301 is able to receive data. Thus, no data collisions will occur on the internal bus system.

It is to be noted that the above described multiplexer/de-multiplexer 300 can be applied to any data network where an interface is to be established between a plurality of physical layer or higher layer devices and a higher layer

device, to thereby reduce the number of required device addresses. In particular, the multiplexer/demultiplexer 300 according to the preferred embodiment may as well be used for connecting the ATM device 200 to a plurality of other ATM devices which may be UTOPIA level 1 or level 2 compliant. The control logic may be a hardware arrangement or a microprocessor controlled on the basis of a corresponding software program.

In summary, a multiplexing and demultiplexing method and apparatus are described, wherein a transmission of input data from one or a plurality of input buffers to a plurality of or one output buffer, respectively, is released when all of the plurality of or the one output buffer is capable of receiving data. Thus, a plurality of devices can be connected to another device using only one address. The plurality of devices may then decide themselves whether the data belongs to them or not. In one direction, the data is broadcasted to all of the plurality of devices and, in the other direction, one of the plurality of devices can transmit data at a time. Accordingly, interface addresses can be saved in case the number of addresses is not enough for all of the plurality of devices.

The above description of the preferred embodiment and the accompanying drawings are only intended to illustrate the present invention. The preferred embodiment of the invention may vary within the scope of the attached claims.

Claims

1. A multiplexing method for supplying input data received from one of a plurality of input channels to an output channel comprising the steps of:
a) providing a plurality of input buffers **(311 to 314)** respectively connected to said plurality of input channels, and an output buffer **(301)** connected to said output channel;
b) storing said received input data in a respective one of said plurality of input buffers **(311 to 314)**; and
c) releasing transmission of said input data from said respective one of said plurality of input buffers to said output buffer, when said output buffer is capable of receiving data.

2. A multiplexing method according to claim 1, wherein said input and output buffers are FIFO buffers.

3. A multiplexing method according to claim 1 or 2, wherein said plurality of input channels are connected to a plurality of physical protocol layer devices **(101 to 104)** having the same interface address allocated.

4. A multiplexing method according to claim 3, wherein said plurality of physical protocol layer devices are UTOPIA level 1 compliant.

5. A multiplexing method according to claim 1 or 2, wherein said plurality of input channels are connected to a plurality of ATM devices having the same interface address allocated

6. A multiplexing method according to any one of the preceding claims, wherein said output channel is connected to an ATM device **(200)**.

7. A multiplexing method according to claim 5 or 6, wherein said ATM device is UTOPIA level 1 or level 2 compliant.

8. A demultiplexing method for supplying input data received from an input channel to a plurality of output channels comprising the steps of:
a) providing an input buffer **(301)** connected to said input channel and a plurality of output buffers **(311 to 314)** respectively connected to said plurality of output channels;
b) storing said input data in said input buffer; and
c) releasing transmission of said input data from said input buffer to said plurality of output buffers, when all of said plurality of output buffers are capable of receiving data.

9. A demultiplexing method according to claim 8, wherein said input and output buffers are FIFO buffers.

10. A demultiplexing method according to claim 8 or 9, wherein said plurality of output channels are connected to a plurality of physical protocol layer devices having the same interface address allocated.

11. A demultiplexing method according to claim 10, wherein said plurality of physical protocol layer devices are UTOPIA level 1 compliant.

12. A demultiplexing method according to claim 8 or 9, wherein said plurality of output channels are connected to

a plurality of ATM devices having the same interface address allocated.

13. A demultiplexing method according to any one of claims 8 to 12, wherein said input channel is connected to an ATM device **(200)**.

14. A demultiplexing method according to claim 12 or 13, wherein said ATM device is UTOPIA level 1 or level 2 compliant.

15. A multiplexing apparatus for supplying input data received from one of a plurality of input channels of said multiplexing apparatus to an output channel thereof, comprising:
a) a plurality of input buffer means **(311 to 314)** respectively connected to said plurality of input channels, wherein said input data is stored in a respective one of said plurality of input buffer means **(311 to 314)**;
b) output buffer means **(301)** connected to said output channel; and
c) control means **(320)** for releasing a transmission from said respective one of said plurality of input buffer means **(311 to 314)** to said output buffer means **(301)**, when said output buffer means **(301)** is capable of receiving data.

16. A multiplexing apparatus according to claim 15, wherein said input **(311 to 314)** and output **(301)** buffer means are FIFO buffers.

17. A multiplexing apparatus according to claim 15 or 16, wherein said control means **(320)** is arranged to receive a control signal indicating the receiving capability from said output buffer means **(301)**, and to supply a release

signal to said respective one of said plurality of input buffer means **(311 to 314)** in response to the receipt of said control signal.

18. A multiplexing apparatus according to any one of claims 15 to 17, wherein said input channels are connected to a plurality of physical protocol layer devices **(101 to 104)** having the same interface address allocated.

19. A multiplexing apparatus according to claim 18, wherein said plurality of physical protocol layer devices **(101 to 104)** are UTOPIA level 1 compliant.

20. A multiplexing apparatus according to any one of claims 15 to 17, wherein said input channels are connected to a plurality of ATM devices having the same interface address allocated.

21. A multiplexing apparatus according to any one of claims 15 to 20, wherein said output channel is connected to an ATM device **(200)**.

22. A multiplexing apparatus according to claim 20 or 21, wherein said ATM device **(200)** is UTOPIA level 1 or level 2 compliant.

23. A demultiplexing apparatus for supplying input data received from an input channel of said demultiplexing apparatus to a plurality of output channels thereof, comprising:

a) input buffer means **(301)** for storing said input data;

b) a plurality of output buffer means **(311 to 314)** respectively connected to said plurality of output channels; and

c) control means **(320)** for releasing a transmission from said input buffer means **(301)** to said plurality of output buffer means **(311 to 314)**, when all of said plurality of output buffer means **(311 to 314)** are capable of receiving data.

24. A demultiplexing apparatus according to claim 23, wherein said input **(301)** and output **(311 to 314)** buffer means are FIFO buffers.

25. A demultiplexing apparatus according to claim 23 or 24, wherein said control means **(320)** is arranged to receive a control signal indicating the receiving capability from anyone of said plurality of output buffer means **(311 to 314)**, and to supply a release signal to said input buffer means **(301)**, when said control signal has been received from all of said plurality of output buffer means **(311 to 314)**.

26. A demultiplexing apparatus according to any one of claims 23 to 25, wherein said input channel is connected to an ATM device **(200)**.

27. A demultiplexing apparatus according to claim 26, wherein said ATM device **(200)** is UTOPIA level 1 or level 2 compliant.

28. A demultiplexing apparatus according to any one of claims 23 to 27, wherein said output channels are connected to a plurality of physical protocol layer devices **(101 to 104)** having the same interface address allocated.

29. A demultiplexing apparatus according to claim 28, wherein said plurality of physical protocol layer devices **(101 to 104)** are UTOPIA level 1 compliant.

30. A demultiplexing apparatus according to any one of claims 23 to 27, wherein said output channels are connected to a plurality of ATM devices having the same interface address allocated.

Abstract

The invention relates to a multiplexing and demultiplexing method and apparatus, wherein a transmission of input data from one or a plurality of input buffers to a plurality of or one output buffer, respectively, is released when all of the plurality of or the one output buffer is capable of receiving data. Thus, a plurality of devices can be connected to another device using only one address. The plurality of devices may then decide themselves whether the data belongs to them or not. In one direction, the data is broadcasted to all of the plurality of devices and, in the other direction, one of the plurality of devices can transmit data at a time. Accordingly, interface addresses can be saved in case the number of addresses is not enough for all of the plurality of devices.

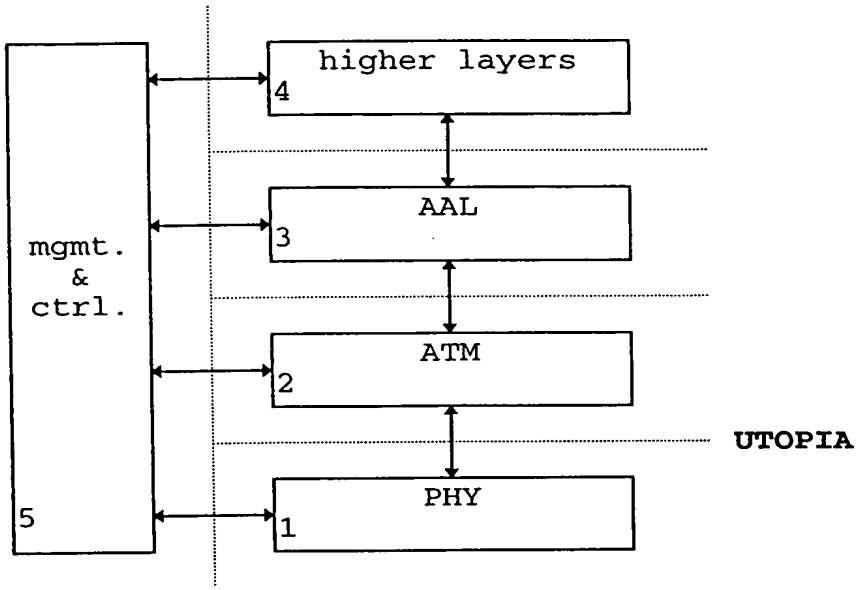

Fig. 1

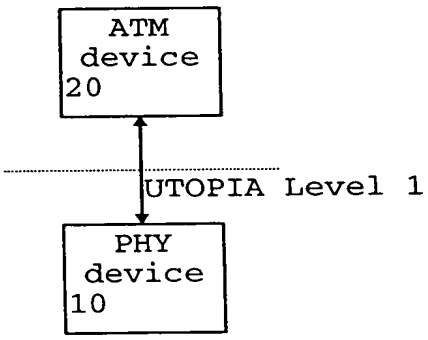

Fig. 2A

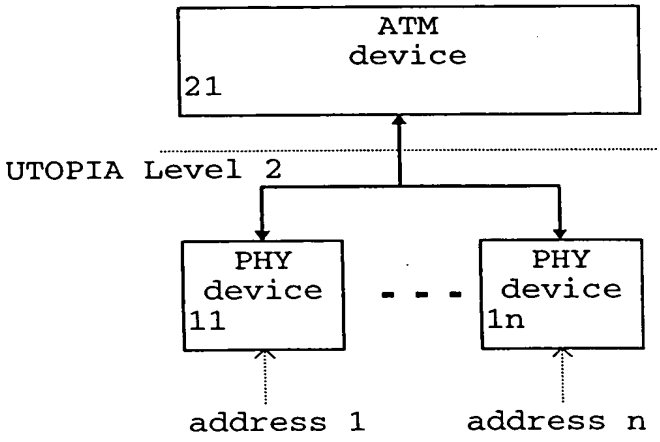

Fig. 2B

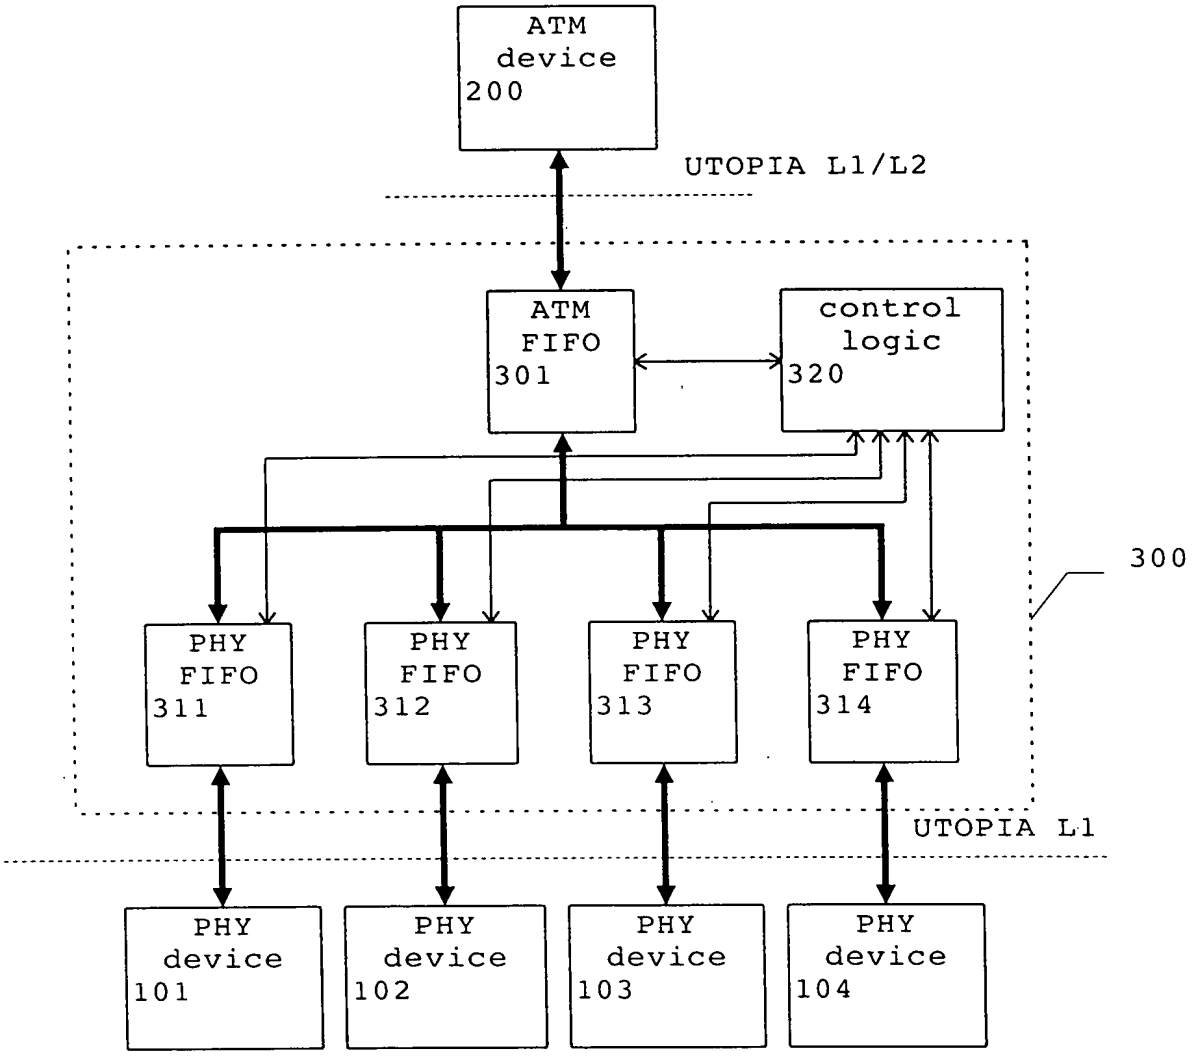
ATM
device
200
UTOPIA L1/L2
ATM
FIFO
301
control
logic
320
300
PHY
FIFO
311
PHY
FIFO
312
PHY
FIFO
313
PHY
FIFO
314
UTOPIA L1
PHY
device
101
PHY
device
102
PHY
device
103
PHY
device
104

Fig. 3

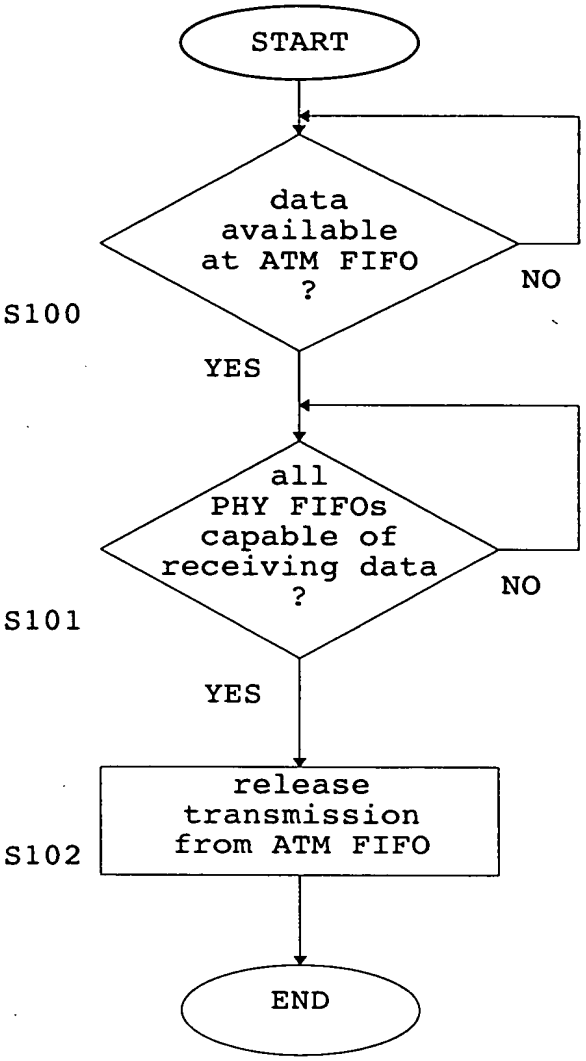
START
data available at ATM FIFO ?
NO
S100
YES
all PHY FIFOs capable of receiving data ?
NO
S101
YES
release transmission from ATM FIFO
S102
END

Fig. 4A

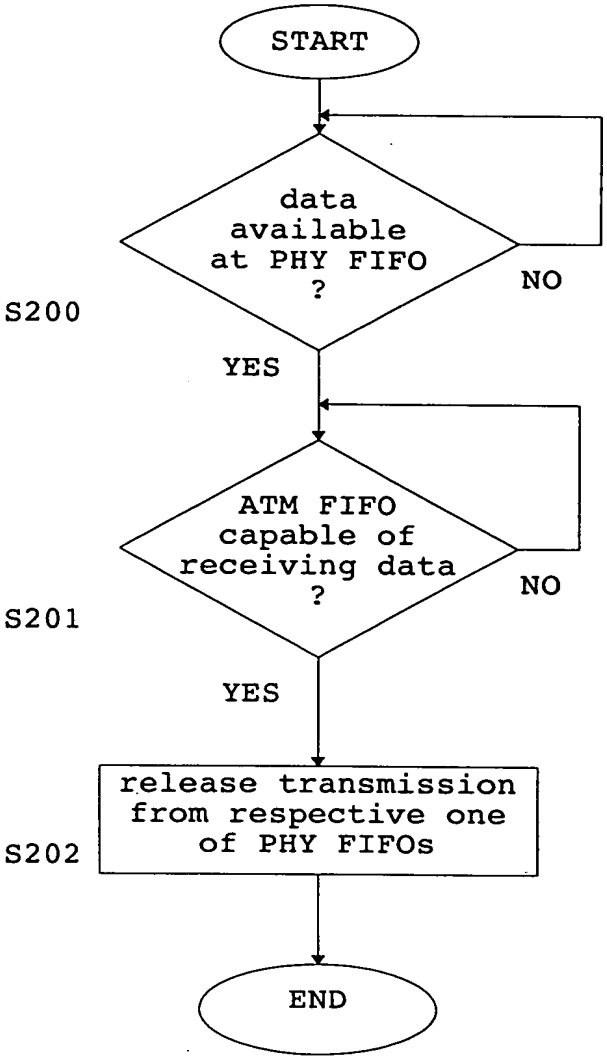
START
data available at PHY FIFO ?
NO
S200
YES
ATM FIFO capable of receiving data ?
NO
S201
YES
release transmission from respective one of PHY FIFOs
S202
END

Fig. 4B